

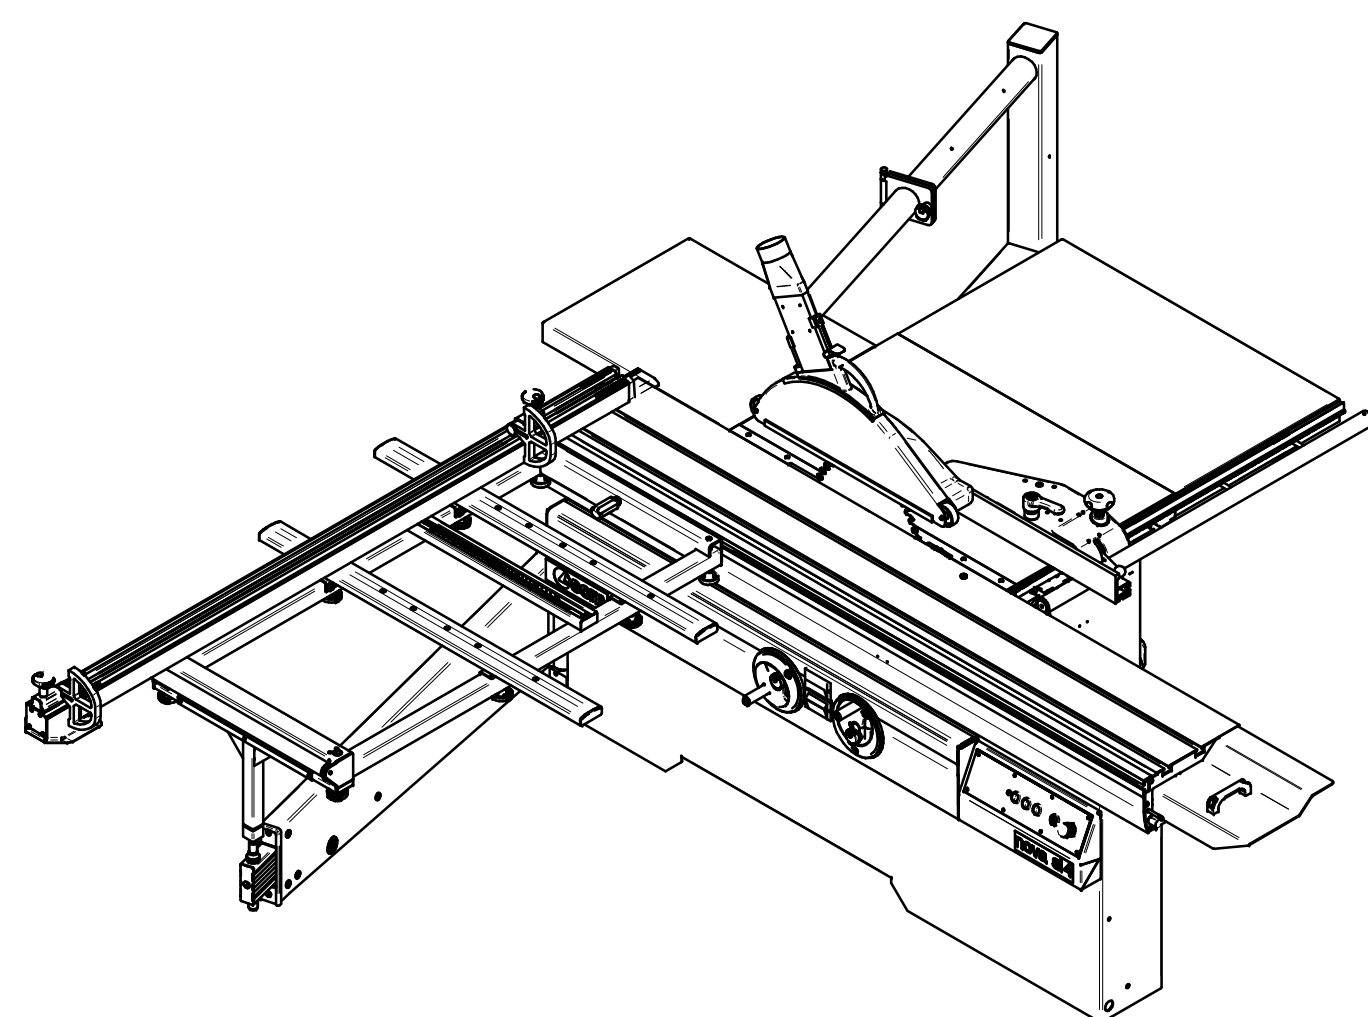
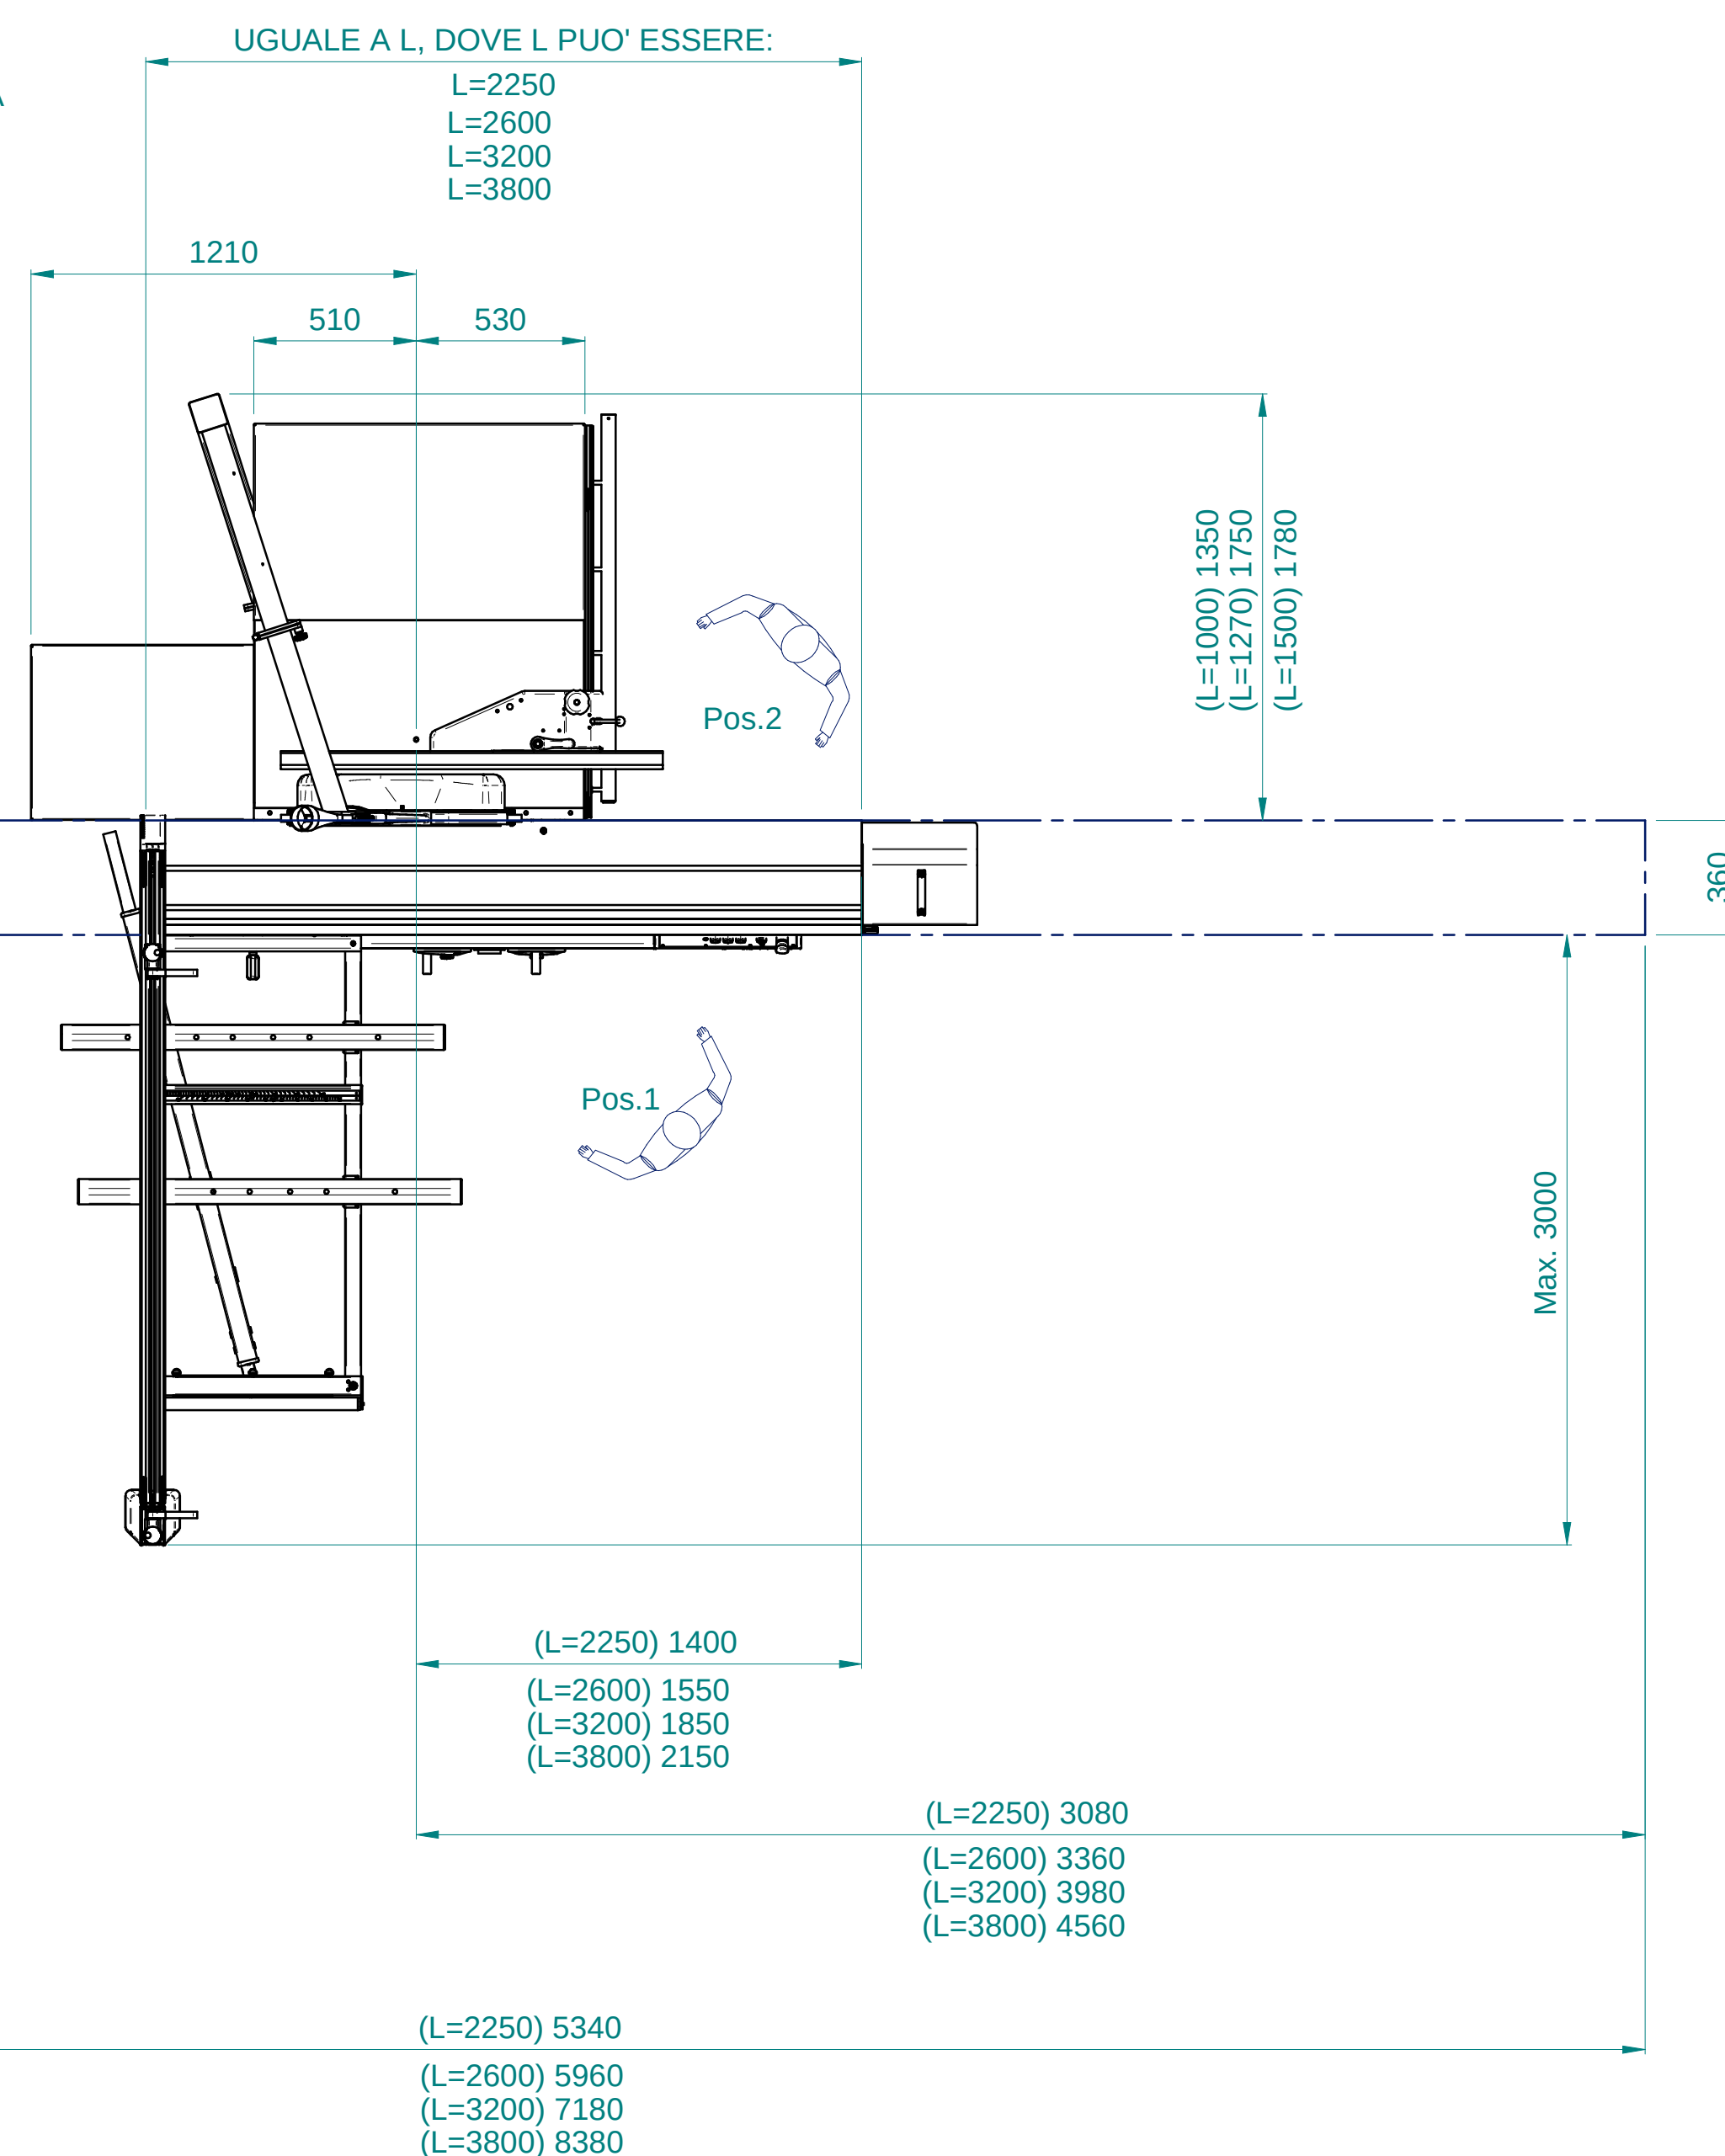
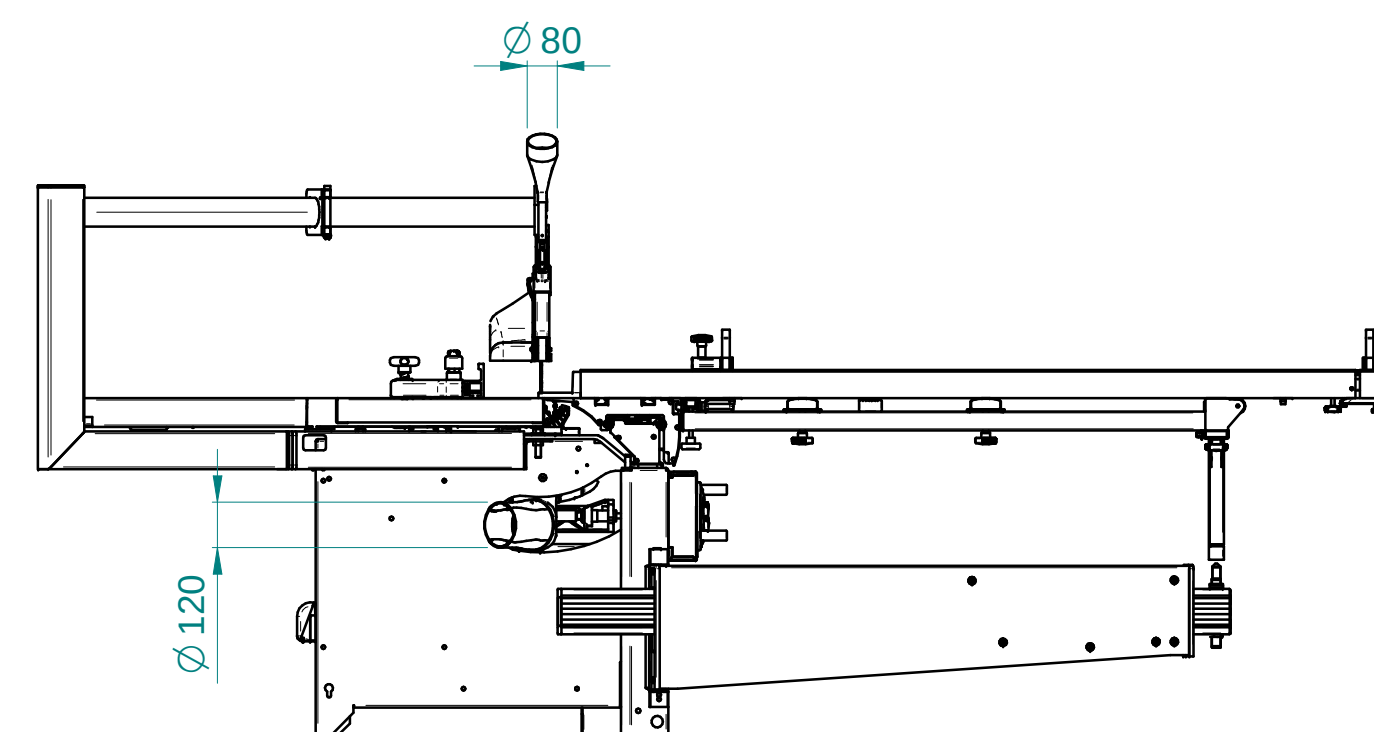


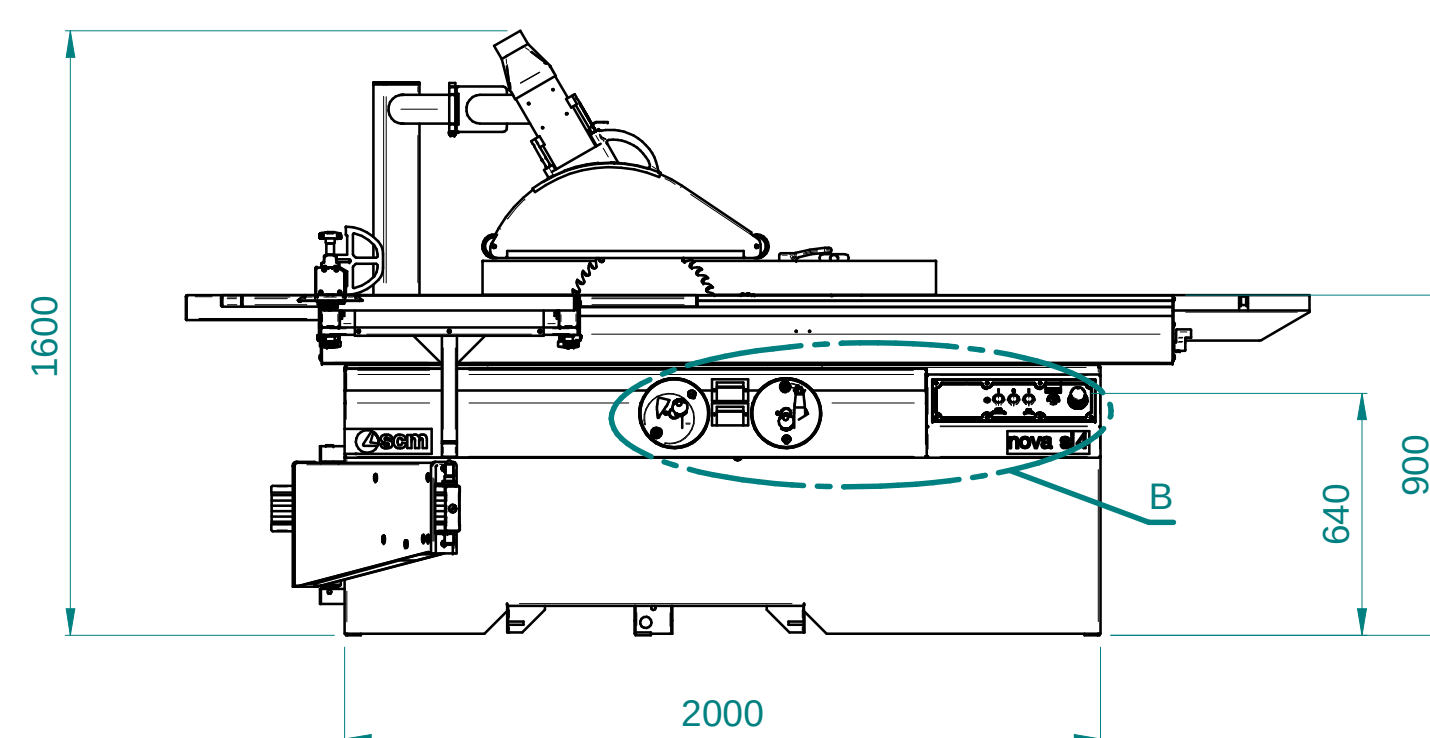


DATI TECNICI ASPIRAZIONE		
Diametro della bocca di aspirazione sotto il piano	Ø 120	mm
Diametro della bocca di aspirazione sulla cuffia di protezione sospesa (separata dal coltello divisore)	Ø 80	mm
Velocità aria aspirazione	20	m/sec
Consumo aria aspirazione	1200	m³/h
Depressione raccordo sotto il piano [Ø 120 mm]	560	Pa
Depressione della bocca di aspirazione sulla cuffia di protezione sospesa (separata dal coltello divisore) [Ø 80 mm]	1410	Pa

SUCTION SYSTEM SPECIFICATIONS		
Diameter of the suction under the table	Ø 120	mm
Diameter of the suction on the hood of hanging guard (separated from the riving knife)	Ø 80	mm
Air speed	20	m/sec
Air consumption	1200	m³/h
Vacuum value inside the fitting under the table [Ø 120 mm]	560	Pa
Vacuum value inside the fitting on the hanging guard hood (separated from the riving knife) [Ø 80 mm]	1410	Pa



= POSIZIONE OPERATORE
= OPERATOR'S POSITION



= COLLEGAMENTO ELETTRICO
= ELECTRIC CONNECTION



- = COLLEGAMENTO DI MESSA A TERRA
- = GROUNDING

VERSIONE CON KIT LAMA 400

RICA VATO DA 90L0804076D

[illegible]